




1946

GRT10L

THREE-PHASE
CUTTING UNIT

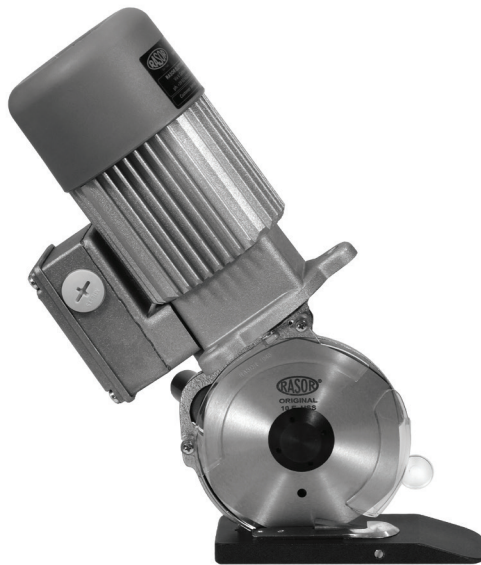

USE MANUAL

Rasor® Elettromeccanica S.r.l. was established in Milan in 1946 by Luigi Spinelli. For more than sixty years it has been producing automatic cutting systems, cutting units for textile applications and electric and pneumatic cutters.



Initially considered as a point of reference for cutting systems in the textile applications, the Rasor® products are nowadays widely used in other fields: chemical, automotive, nautical and sport sectors and in furniture manufacturing.

Nowadays Rasor® can rely on the professional continuity of two generations, with the experience inherited from the promoting partner, with his passion and dedication.

The main characteristic of Rasor® is that each working phase, starting from the manufacturing of the product up to its packing and delivery is carried out in Rasor® premises by qualified operators who have professionally grown up following the spirit of the company and of its founders. This ensures the high quality which Rasor® has always considered as essential since the beginning of its activity.

Following the innovative spirit mentioned above, our company is constantly focused on the improvement of the product quality, on the study and development of new materials and technologies.

ACKNOWLEDGMENT

Dear Customer,

thank you for choosing a Rasor® Elettromeccanica S.r.l. product.

Rasor® has been a reference point in the field of cutting systems in the textile, clothing, furniture, tailoring, sport, chemical, automotive, nautical and insulating material sectors for years. Its production has been always synonymous with reliability attested by many of satisfied customers.

Rasor® quality system supervises all the company activities in order to provide the Customer with a service that meets its needs and expectations in terms of product quality, delivery reliability and stock of finished products.

All the parts of the devices have been planned and produced to guarantee an optimum performance. In order to keep the high quality level and the long reliability of the Rasor® products, it is recommended to use only original spare parts and to contact the head office for any maintenance work.

1. GENERAL SAFETY RULES



This manual is an integral part of cutting unit GRT10L and must be carefully read before using it since it gives important indications with regards to its safe installation, use and maintenance. Keep it with care.



Before using cutting unit GRT10L, read carefully the following general safety rules.

EN
3

- **PACKAGING.**
After taking off the packaging make sure that the cutting unit is intact. In case of doubt do not use it and contact an authorized service centre. Do not leave pieces of packaging (plastic bags, foam polystyrene, boxes, etc.) within the reach of children or disabled persons since they are potential sources of danger.
- **AVOID DANGEROUS ENVIRONMENTS.**
Prevent the cutting unit GRT10L components from coming in contact with damp or wet surfaces.
- **KEEP CHILDREN AWAY.**
Unauthorized persons, especially children, must be kept away from the working area.
- **FEED CABLE.**
Prevent the feed cable from coming in contact with hot objects, pointed surfaces or sharp edges. Never pull the feed cable of the machine. It must never be replaced by the user. If necessary contact professionally qualified staff.
- **KEEP THE WORKING AREA ALWAYS IN ORDER.**
The workplace must always be kept in order and well lightened; liquids or oil traces must not be present.
- **ALWAYS USE CUTTING UNITS GRT10L PROPERLY.**
Use the cutting units only to carry out the works they have been designed for; do not use them improperly.
- **OBSERVE THE USE OF THE TOOLS.**
Do not cut excessively thick materials and always check blade conditions.
- **AVOID ACCIDENTAL STARTS.**
Before connecting cutting unit GRT10L, make sure that everything is installed properly.
- **CLOTHING.**
Do not use large clothes or accessories that might get stuck in the moving parts.
- **GOGGLES AND PROTECTIVE METAL MESH GLOVES.**
Always use goggles, protective metal mesh gloves recommended by Rasor® during use and maintenance operations (according to UNI EN 388:2017 standard).
- **SPARE PARTS.**

Informative letter

The installer and the maintenance man must know the content of this manual. Although the main features of the machine described in this manual are not subject to change, **Rasor® Elettromeccanica S.r.l.** reserves the right to modify the components, details and accessories it deems necessary to improve the machine or to meet manufacturing or commercial requirements at any time and without being obliged to update this manual immediately.

EN
4



WARNING



ALL RIGHTS ARE RESERVED ACCORDING TO THE INTERNATIONAL COPYRIGHT CONVENTIONS,

The reproduction of any part of this manual, in any form, is forbidden without the prior written authorization of Rasor® Elettromeccanica S.r.l.

The content of this guide can be modified without prior notice. Great care has been taken in collecting and checking the documentation contained in this manual to make it as complete and comprehensible as possible.

Nothing contained in this manual can be considered as a warranty, either expressed or implied - including, not in a restrictive way, the suitability warranty for any special purpose. Nothing contained in this manual can be interpreted as a modification or confirmation of the terms of any purchase contract.

Rasor® Elettromeccanica S.r.l. machines have not been conceived to work in areas at risk of explosions and at high risk of fire and they cannot cut wet or damp materials. Moreover, they cannot work in case of rain.

In case of damage or malfunction, cutting unit GRT10L must not be used until the Customer Care Technical Service has repaired them.

Customer Care Technical Service



For any information, please contact
RASOR® ELETTROMECCANICA S.r.l.
Via V. Caldesi, 6; 20161, MILANO (MI) - ITALY
Tel: +39.02.66221231; Fax: +39.02.66221293
e-mail: info@rasor-cutters.com
web: www.rasor-cutters.com

WARNING




The original configuration of the cutting unit must not be changed at all.
On receiving the machine make sure the supply corresponds to what has been ordered.
In case of non-compliance immediately inform Rasor®.
Also make sure the cutting unit has not been damaged during transport.



2. TRANSPORT AND PACKAGING

The cutting unit is delivered in a cardboard box, inside which there are various options. The code of the ordered product and its serial number are indicated outside the package (see picture 1). The following accessories are contained inside the package:



- 1) Polygonal blade;
- 2) Wrench for blade nut disassembly.
- 3) Drift for blade disassembly.

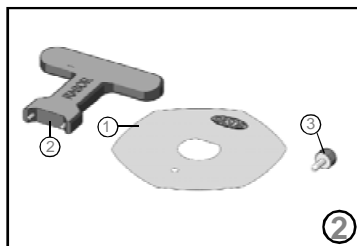

3. PLATE DATA

The manufacturer's identification and CE STANDARD 2006/42/EC conformity plate (see picture below) is located on the front part of the cutting unit.

The plate must not be removed at all, even if the machine is resold. Always refer to the serial number (written on the plate itself) when contacting the manufacturer. Several safety warnings are printed on a card which is applied to the cutting unit feeding cable; such warnings must be strictly followed by everyone dealing with the machine. **The company is not to be held responsible for damage to property or accidents to people which might occur if the above-mentioned warnings are not observed. In such a case, the operator is the only person responsible.**




4. PRODUCT DESCRIPTION

EN
6

The fixture described in this manual is a cutting unit model GRT10L which can be assembled on automatic machines (e.g. spreaders, computerized cutting) by means of proper holes located in the motor support. GRT10L can operate continuously and it can cut at various widths by means of multiple installation. By cutting with the blade and the counterblade always in contact and thanks to the steel upper quality of the blade supplied, GRT10L guarantees the clean separation without frayings of the two borders of the cut material. The three-phase motor with extremely compact dimensions and extreme reliability with 100 mm diameter blades, guarantees cuts with thickness up to 3.5 cm. A sharpener assembled on the cutting unit head allows sharpening the blade at any moment without disassembling it. After carrying out this operation, it is possible to start cutting again. A high power motor, perfectly balanced, with a high number of revolutions and totally free of maintenance, reduces the vibrations to the minimum, thus making the cutting unit comply with Italian Legislative Decree No. 81 dated 9/4/2008 "Testo Unico sulla Salute e Sicurezza sul Lavoro" (Consolidated Act on Health and Safety at Work), Title VIII - CHAPTER III (worker protection from mechanical vibration risks). The mechanical parts are made of high resistance steel, bronze and aluminium and require lubrication after several working hours.

Device components

1	Connector block	8	Aluminium base covered with Teflon®
2	Motor cover	9	Polygonal blade
3	Cable gland	10	Plate locking the threads
4	Motor frame	11	Greaser
5	Sharpener push button	12	Carbide counterblade
6	Emery grinding wheel	13	Motor flange with assembly holes
7	Movable front protection	14	Motor support

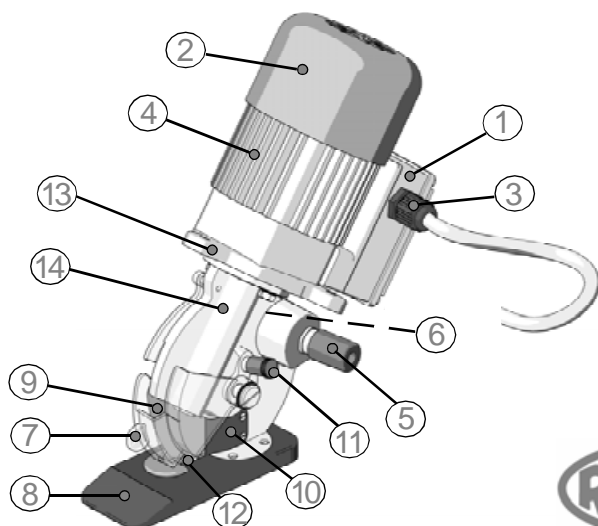

5. TECHNICAL FEATURES

Cutting unit GRT10L features		Features of the available blades	
Blade diameter	100 mm with carbide counter blade	10EHSS	6 side blade Ø 100 mm in H.S.S. steel
Blade speed	550 rpm	10CSW	circular blade Ø 100 mm in Extra Steel
Cutting working depth	about 35 mm	10SEXTG	4 side blade Ø 100 mm, in Extra Steel Germany
Motor power	Three-phase-Asynchronous, 75 W (IP20-CL F)	10EHSSTF	6 side blade Ø 100 mm in H.S.S. steel covered with Teflon®
Max. Absorption	0,36 A	10EMD	6 side blade Ø 100 mm in integral hard metal
Weight (with feeding cable)	2800 g	10CFR	cutter circular blade Ø 100 mm, in Extra Steel
Weight with package	3800 g		
Electric cable length	1,5 mt		
Minimum light for working operations	LUX 200		
Vibrations at the start up	< 2,5 m/s ²		
Temperature	0 ~ 55°C		
Humidity	10 ~ 95% without condensate		

This technical data is only indicative and may be subject to change without notice.

6. NOISE LEVEL

The maximum acoustic pressure level emitted by cutting unit GRT10L is about 60 dB (A). Noise tests have been carried out in compliance with Standard UNI EN ISO 11202:2010. The device noise levels, measured at different distances (without any sound wave filtering system), vary in the extent of few db (A).

NOTE

It is advisable for cutting unit GRT10L owners to verify the compliance with the standard concerning safety of workers: Italian legislative decree 81/08.

7. FIELD OF APPLICATION

Cutting unit GRT10L has been designed, manufactured and assembled to cut every kind of fabrics or materials, with the exception of metal, plastic or wood, by means of rotary polygonal blades.

This equipment must not work:

- in areas prone to explosions;
- in presence of fine dust or corrosive gases;
- on wet or damp materials;
- to cut plastic, metal and wooden materials.

It is forbidden to use cutting unit GRT10L for purposes different from the above-mentioned ones.

8. USE WARNINGS

We recommend following the indications below in order to work in safety conditions.

- All the operations must be carried out complying strictly with the safety rules of the country where the device is to be installed.
- It is **STRICTLY FORBIDDEN** to smoke during the installation or adjustment operations of the cutting unit.
- The Customer undertakes to comply with and make his staff observe all the rules and regulations in force concerning safety, prevention of accidents and health in the work place. Therefore, the Customer assumes the responsibility to strictly follow all the rules and regulations in force, as well as the special provisions in force in sport and public installations the Customer declares to know after receiving all the relative necessary information.
- **The cutting unit also works without its safety protective device. This protective device must NEVER be removed.**
- Always check the resistance of the material to be cut and the kind of blade which is being used.
- The Customer shall equip his own personnel with all the individual safety protections for the execution of the works, as well as with the ones which might be prescribed by the Manufacturer due to specific danger conditions of the plant or of the area where the personnel must work.
- Do not make any adjustment while the blade is working or while the electric plug is connected.
- Always pay attention to the electric cable position to prevent it from being cut or damaged by the blade.
- It is allowed to assemble cutting unit GRT10L on machines O.E.M. on condition that their original structure is not modified. Otherwise, the intervention must be certified by Rasor®.


9. ELECTRIC CONNECTION

Firstly make sure that the lines are able to feed the cutting unit correctly, in compliance with the safety rules (for the feature required see par. 5).

WARNING



We suggest installing a magnetothermic safety device before the cutting unit and check that the ground circuit is effective. Before working on the feeding cable pull the plug out. Check that electric connections and protections correspond to the driving force and the plate data values (voltage and current), required by the different electric circuits. By referring to the CEI 11-27/1 standard all the works carried out by means of electric current must be performed by a staff, who has been provided with all the devices required by the above-mentioned standard. For the works carried out under voltage, it is necessary that the employer certifies the suitability, against formative processes. The cutting unit GRT10 is supplied with electric cable connected to the connector block located beside the motor. The user must connect the cutting unit to the mains (the cable complies with the CEI 20-22 III Standard). Never change the length of the cable supplied. If it is necessary, use a longer cable and replace the one supplied. To connect the new cable open the cover "A" by unscrewing the 4 cross-slotted screws "B" (see picture 3). Connect the phase cable to the terminal board. The minimum section of the connecting cables must be determined by the operator in charge of the installation. We recommend to use safety cables and socket IMQ approved. Check the connection by enabling the cutting unit and verify the rotation direction. The cutting unit is provided with earthing



dal 1946

(yellow-green cable). Possible faulty earthing connections may cause unsafe working conditions. Possible damages are not at RASOR® s.r.l. charge.

The electric feeding must be supplied by a line protected against overcurrent by means of the automatic switch (magnetothermal) or delayed fuses with a suitable dimensions. The current of the safety devices must be as low as possible considering the max. absorption of the machine (see identification plate).

WARNING

The operator must arrange a disconnection switch on the supply line in order to switch off the machine, if necessary.

10. RESIDUAL RISKS

Even though the cutting unit is safe, operators must pay attention to preserve their and other people's safety.

- ⊗ At the end of the working operations, the motor could be very hot.
- ⊗ The cutting blade can work even when the protective device is disassembled.

11. INSTALLATION AND USE

To install and use the cutting unit manually, proceed as follows:

- 1) Fix the cutting unit on level squares or angles by means of four 5MA screws, by inserting them in the four holes located in the motor lower cover (see pictures 4 and 5).

NOTE

The cutting unit can be installed in any position/angle: vertically, laterally and it can be turned upside down. It is not compulsory for the Teflon base to touch the machine table.




- 2) Lay the material to be cut;
- 3) Connect the cutting unit to the electric feeding;
- 4) Put the material on the cutting foot;
- 5) Adjust the front mobile protection according to the thickness of the material to be cut (see picture 6);
- 6) Carry out the cutting operation.

NOTE

Cutting unit GRT10L can work in a fixed position (the material has to be moved) or it can move forward while the material is kept in the same position. Make sure the material to be cut is properly stretched, preventing it from curling.

WARNING


Never use the two bolts which fix the motor to the cutting part to fasten cutting unit GRT10L. This operation may cause the motor shaft to break. In this case, warranty is not valid.




12. BLADE SHARPENING

EN
10

After many hours of a continuative use of the cutting unit, or if it would not be able to cut anymore, it is necessary to sharpen the blade. To carry out this operation, start the blade and press sharpener "2" located on it for 3-4 seconds (by pressing push button "1", as shown in picture 7). Repeat the operation 2-3 times.

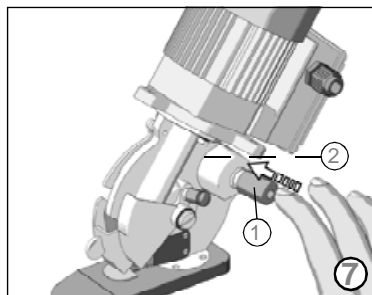


If the sharpening operation is not effective, check the wear of emery grinding wheel "3" (see picture 8). If emery grinding wheel "3" is too worn or dirty, replace it.

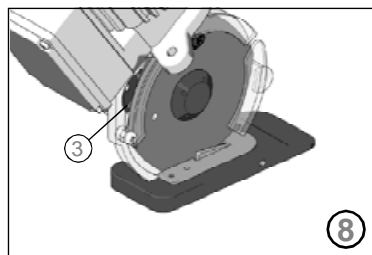

13. LUBRICATION

Every 3-4 working days, it is necessary to lubricate the pair of gears. To carry out this operation, remove protective plug "A" located on the motor support of the cutting unit and fill it with lubricating grease Rasor. Screw plug "A" again few turns. Screw plug "A" some turns every 3-4 working days (see picture 9).

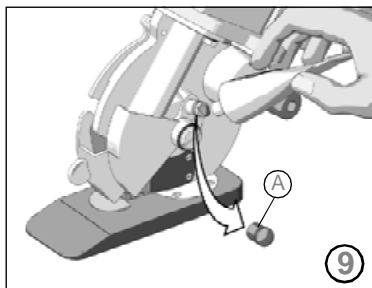






WARNING
The blade must never be dirty with grease or oil.

14. BLADE REPLACEMENT

If the blade is no more able to cut (even after repeating the sharpening operation several times) it is necessary to replace it. To carry out this operation, use wrench "1" and drift "3" locking the blade (shown in picture 10).

To replace the blade, proceed as follows:

- 1) Use some protective gloves in compliance with Italian Legislative Decree 81/08;
- 2) Remove the mobile front safety protection "A" (see picture 11) by unscrewing pin "C" and removing the two washers "D" as shown in picture 12. Remove the fixed rear safety protection "B" (see picture 11) by unscrewing the two cross screws "E" by means of the proper screwdriver (not supplied by the manufacturer) as shown in picture 13.
- 3) Insert drift "3" into hole "F" (see picture 14), so as to lock the blade (the hole on the blade must correspond to the one on the motor support).
- 4) Use wrench "1" to unscrew nut "G" and remove blade "H" (see picture 14).
- 5) Replace the worn blade with the new one "2", being careful to center the blade on the gear, in the correct position, and remember to assemble it, so that the Rasor writing can be seen by the operator.
- 6) Assemble all the components again and carry out the sharpening.

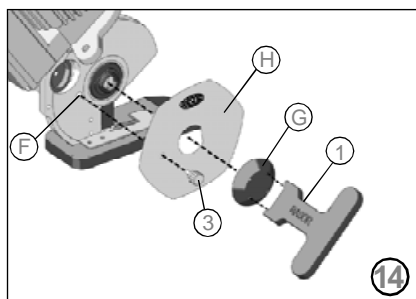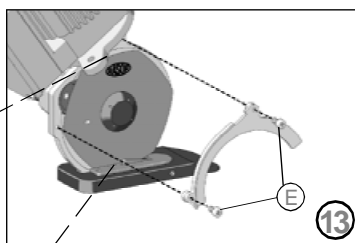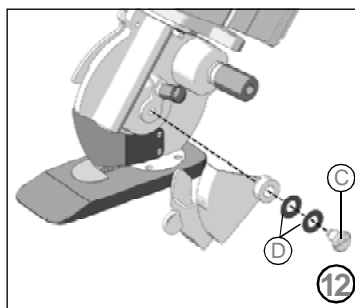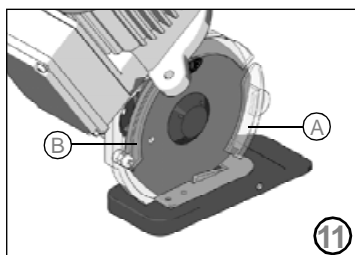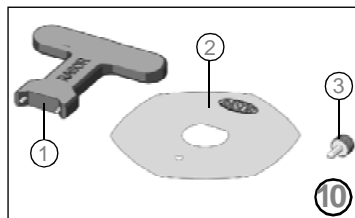


15. TROUBLESHOOTING

EN
12

PROBLEM	SOLUTION
The fabric is not cut or it gets stuck between the blade and the counterblade	Check that the blade and the counterblade are in contact
	Check the kind of fabric
	Sharpen the blade
	Check the fabric thickness
	Check the compatibility between blade and fabric
	Make sure that the motor turns correctly
The cutting unit is noisy	Reduce the speed of travel
	Check the counterblade integrity
	Carry out the lubrication
	Disassemble the blade and remove the material residues
The cutting unit starts slowly, works intermittently or it does not start	Check the wear of the pair of gears
	Check the electric connections on the O.E.M. unit
	Check the electric connections
	Check the feeding cable




16. SPARE PARTS / EXPLODED VIEW

CODE	DESCRIPTION	CODE	DESCRIPTION	CODE	DESCRIPTION	CODE	DESCRIPTION
10EH55	HEXAGONAL BLADE Ø 100 mm, H.S.S. STEEL	GRT8615	SPACER	SW10815	CARBIDE COUNTERBLADE	T10495	PLATE LOCKING THE THREAD
GMT1000	COMPLETE MOTOR GRT10, 3ph 380 V 50 Hz	GRT8616	DOWEL FASTENING THE FAN	SW108200	SCREW FASTENING THE COUNTERBLADE	T105000	SCREW 2.6MA FASTENING THE PLATE LOCKING THE THREAD
GMT1000/480	COMPLETE MOTOR GRT10, 3ph 480 V 60 Hz	GRT8617	MOTOR BEARING mm 6x19x6	SW108600	EMERY Ø 25x9x6 mm	T105200	MOTOR SUPPORT FIXING BOLT
GMT1060	COMPLETE MOTOR GRT10, 3ph 380 V 60 Hz	GRT8618	MOTOR BEARING mm 10x30x9	SW1086CPL	COMPLETE SHARPENER	T105300	SPLIT WASHER
GRT1013	COMPLETE ROTOR GRT10	GRT8619	COMPENSATION RING	SW108700	SHARPENER PIN	T105400	ANTI-FRICTION BUSH
GRT1014	MOTOR FRAME SCREW	SW104101	SCREW FOR THE REAR GUARD FIXING	SW108800	EMERY SPRING Ø 11 mm	T105600	WASHER
GRT101800	WORM SCREW MOD. 1 5P	SW104101S	REAR PROTECTION GUARD	SW108900	SHARPENER BUSH	T105700	RING LOCKING THE GEAR BEVEL BEARING
GRT1018CPL	COMPLETE PAIR OF GEARS	SW104101SCPL	REAR PROTECTION SET	SW109000	EMERY SPRING Ø 6 mm	T105800	GEAR BEVEL BEARING
GRT1059CPL	GEAR BEVEL MOD. 1 5P	SW10445	FRONT PROTECTION GUARD	SW109100	SHARPENER CAP WITH BEARING	T106000	LEFT SCREW FASTENING THE GEAR BEVEL
GRT10M18	MOTOR COVER	SW10445CPL	FRONT PROTECTION SET	SW109200	SCREW FASTENING THE SHARPENER CAP	T106100	RING UNDER BLADE
GRT10M19	MOTOR FAN	SW1055SL	COMPLETE MOTOR SUPPORT	SW109300	WASHER	T106300	RING NUT FASTENING THE BLADE
GRT10M21	UPPER MOTOR FLANGE	SW1074MS	LEFT BASE WITH BEVEL	T101801	ELASTIC PIN	T107000	SCREW FASTENING THE BASE/PLATFORM/SECTOR
GRT10M24	MOTOR FRAME	SW1074MSCPL	COMPLETE LEFT BASE WITH BEVEL	T104500	SCREW FASTENING THE FRONT PROTECTION	T107500	BLADE ASSEMBLING/DISASSEMBLING WRENCH
GRT10M26	LOWER MOTOR FLANGE	SW1076S	SPRING WITH DOWEL	T104501	CONVEXED WASHER	T107600	DRIFT LOCKING THE BLADE
GRT10M97	COMPLETE TERMINAL BOX SUPPORT	SW107900	SCREW FASTENING THE COUNTERBLADE HOLDER	T104700	GREASER CAP	T107900	LUBRICATING GREASE
GRT27	FLAME RETARDANT FEEDING CABLE	SW1080S	COUNTERBLADE HOLDER	T104800	GREASER		



GMT1000 (3-PH, 380V, 50Hz)
GMT1060 (3-PH, 380V, 60Hz)
GMT1000-460 (3-PH, 460V, 60Hz)

GRT10M18

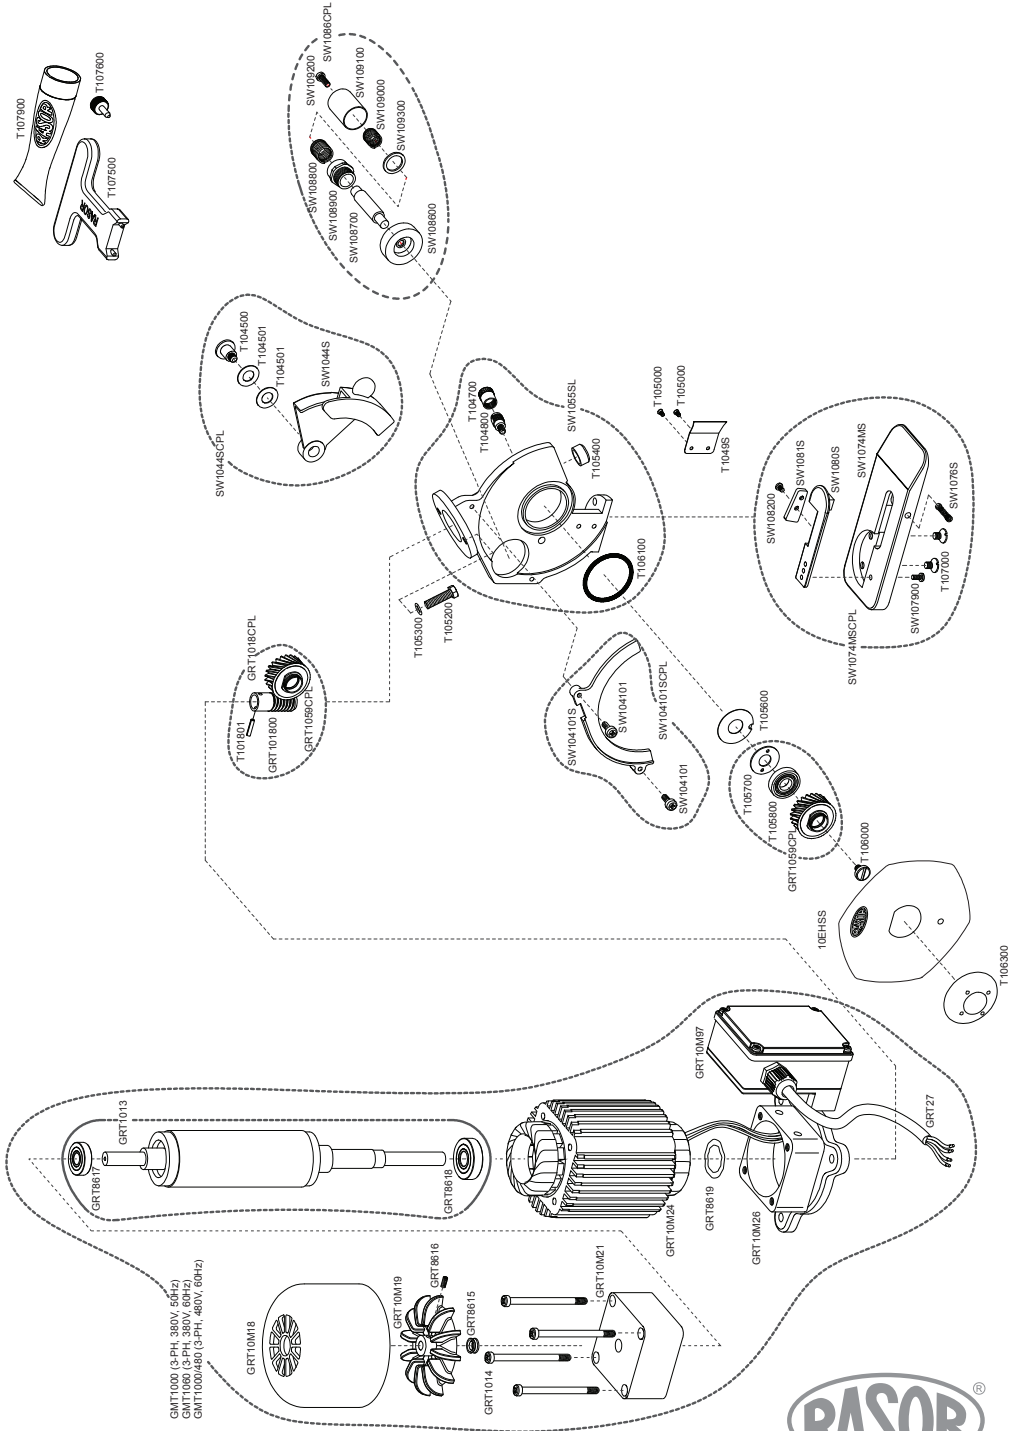

1946

WARRANTY

Rasor® Elettromeccanica S.r.l. cutting unit has a 12 month warranty from the date indicated on the last page of this manual, except in case of different written agreements.

The warranty covers all manufacturing and material defects. Replacement and repair operations are covered only if carried out by our company and at our workshop. If in-warranty goods need to be repaired, **the customer must always send the complete machine to Rasor®.**

Single units will not be repaired under warranty.

The material to be repaired must be sent CARRIAGE FREE.

Once the machine has been repaired, it will be sent CARRIAGE FORWARD to the customer. The warranty covers neither technicians' intervention on site nor the machine disassembly from the installation place.

If for practical reasons, one of our technicians is sent to the premises, the customer will be charged the costs plus the travelling expenses.

The warranty does not include:

- failure caused by wrong use or assembly,
- failure caused by external agents,
- failure caused by lack of maintenance or negligence;
- blades and parts subject to wear.

WARRANTY FORFEITURE:

- in case of arrearage or other breaches of contract,
- whenever changes or repairs are carried out on our cutting units without our prior authorization,
- whenever the serial number is tampered with or cancelled,
- whenever the damage is caused by improper use, bad treatment, bumps, falls and other causes not due to normal working conditions,
- whenever the unit seems tampered with, dismantled or previously repaired by unauthorized staff,
- in case the cutting units are used for purposes that are different from the ones described in this manual.

All repair operations carried out under warranty do not interrupt its duration.

All disputes will be settled in the court of justice of Milan (Italy).

We thank you in advance for the attention you will pay to this manual and we invite you to inform us of any change you deem necessary to improve it and make it more complete.

RASOR ELETTROMECCANICA SRL

Via Vincenzo Caldesi 6

20161 Milan · Italy

ph. +39 02 66 22 12 31

fax +39 02 66 22 12 93

info@rasor-cutters.com

www.rasor-cutters.com

FOLLOW US:

