



**EASY
& FAST**

FP861RC NEW PNEUMATIC HAND SHEAR


FP861RC. The best roll cutter available.

RASOR[®]

1946



NEW PNEUMATIC HAND SHEAR FP861RC

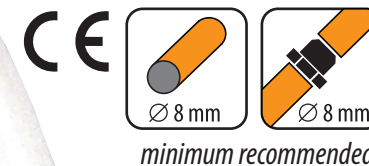

TECHNICAL DETAILS:

- Muffled turbine motor with central back-located air exhaust
- 6 bar nominal* (± 1 bar) lubricated air supply
- Air consumption:** 9 std liters/sec*
- Power:** 400 W at nominal air supply conditions
- Blade:** 86 mm with hard metal counterblade
- Blade descr.:** 86THSSTH, 86 mm dia., 8-edge, HSS steel Teflon[®] coated
- Blade speed:** 900 r.p.m.*
- Cutting ability:** 3 - 10 - 20 mm
- Sound pressure:** 72 dBe (EN ISO 15744)*
- Vibration Level:** 1,36 m/sec² (ISO 8662)*
- Net weight:** 1600 g
- Total weight (with packing):** 2600 g
- Temperature range:** 0 – 55 C
- Umidity range:** 10 – 95% without condensate



Rasor recommend to use only dry air lubricated with special Rasor VG 10 pneumatic oil

*The reported data are collected at a pressure of 6 bar (ISO 2787: 1984), recommended operating pressure.

WHAT'S NEW:

- New soft-touch rubber handle
- Central back-located air exhaust
- Cutting depth adjustable: 3-10-20 mm
- High manageability in 1600 g

FOLLOW US:



RASOR ELETTROMECCANICA SRL

Via Vincenzo Caldesi 6 • 20161 Milan • Italy
ph. +39 02 66 22 12 31 • fax +39 02 66 22 12 93
info@rasor-cutters.com

www.rasor-cutters.com



BLADES AVAILABLE:

- 86THSSTF**, 86 mm
8-edges, HSS steel
Teflon[®] coated
- 86PHSSTF**, 86 mm
5-edges, HSS steel
Teflon[®] coated